

A Novel Approach for Modeling Order Picking Paths

S. G. Ozden^{a,*}, A. E. Smith^b, K. R. Gue^c

^a*Information Sciences & Technology, Penn State Abington, Abington, PA 19001, USA*

^b*Department of Industrial & Systems Engineering, Auburn University, Auburn, AL 36849, USA*

^c*Department of Industrial Engineering, University of Louisville, Louisville, KY 40292, USA*

Abstract

We introduce the visibility graph as an alternative way to estimate the length of a route traveled by order pickers in a warehouse. Heretofore it has been assumed that workers travel along a network of travel paths corresponding to centers of aisles, including along the right angles formed where picking aisles join cross aisles. A visibility graph forms travel paths that correspond to more direct and, we believe, more appropriate “travel by sight”. We compare distance estimations of the visibility graph and the aisle-centers method analytically for a common traditional warehouse design. We conduct a range of computational experiments for both traditional and fishbone warehouse layouts to assess the impact of this change in distance metric. Distance estimations using aisle-centers calculates a length of a picking tour on average 10–20% longer compared to distance estimations based on the visibility graph. The visibility graph metric also has implications for warehouse design: when comparing three traditional layouts, the distance model using a visibility graph resulted in choosing a different best layout in 13.3% of the cases.

Keywords: Routing, Shortest Path Problem, Warehouse Design, Visibility Graph, Computational Geometry

1. Introduction

An important part of warehouse modeling is the task of determining the distance between two points. Virtually every warehousing paper in the literature uses the rectilinear or Manhattan metric to estimate the distance between two points. However, in practice often workers “cut corners” and do not make turns at exact right angles (see Figure 1). The effects of this imprecision when modeling depend on the size of the warehouse, the width of aisles, the number of corners a worker could cut, and most importantly, the question one seeks to answer with the model. As we will show, the existing distance metric almost certainly over-estimates the distance traveled by workers, and therefore labor costs are most likely over-estimated and throughput rates are under-estimated. However, if the question addresses different operating policies within the same layout the results

*Corresponding author

Email addresses: gokhan@psu.edu (S. G. Ozden), smithae@auburn.edu (A. E. Smith), kevin.gue@louisville.edu (K. R. Gue)

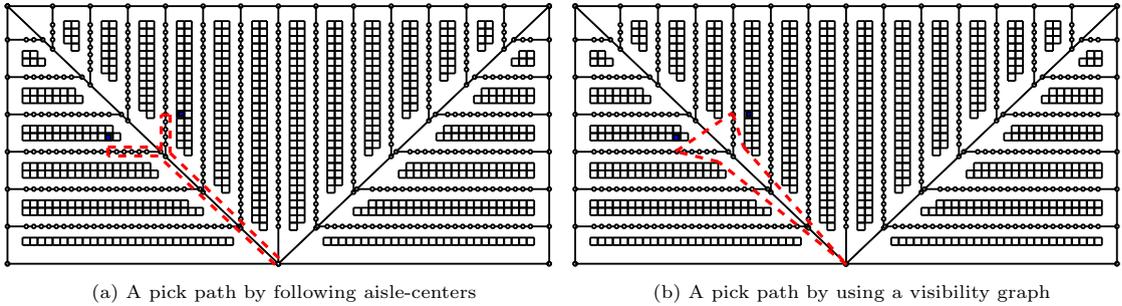


Figure 3: Pick path examples for picking two items from the storage locations shown in bold and returning to the depot (at bottom center).

length. Every favorable angle has a corresponding unfavorable angle that poorly represents what might be expected of ordinary worker travel patterns. By any reasonable estimate of worker behavior, using the network model of Gue and Meller (2009) overestimates the distance of tours that require turns of greater than 90 degrees (see Figure 3).

We propose the alternative approach of using visibility graph based distances between points in a warehouse to represent reasonable levels of corner cutting that one would expect of productive order pickers and compare them with the distances based on aisle-centers. The visibility graph is a special graph whose nodes are the vertices of obstacles (or points of attraction) and whose edges are pairs of mutually visible nodes. Figure 3b shows an example of a pick path using a visibility graph, where obstacles are the storage locations (racks or pallets). These proposed paths also serve as a lower bound on travel distances because no shorter path exists without passing through obstacles. However, the example in Figure 3b has its own issue: because storage locations are themselves obstacles, paths intersect storage racks along their perimeters. To address this difficulty, we create a buffer distance around storage locations and present the effects of the size of the buffer distance in Section 3.

Pohl et al. (2009b) used the aisle-centers metric to compare a fishbone layout to a traditional layout for dual command operations and found that the fishbone layout can reduce travel distance by 10-15%. Çelik and Süral (2014) also used the aisle-centers metric to compare a fishbone layout to a traditional layout for general order picking operations. They found that the fishbone layout can perform up to 30% worse than an equivalent traditional layout as the number of picks increases. Hall (1993) developed distance approximations for a one block warehouse by using the aisle-centers metric and compared different picking strategies for routing a manual order picker. Petersen (1999), Dijkstra and Roodbergen (2017), and Altarazi and Ammouri (2018) used the aisle-centers metric to compare various storage policies and routing heuristics simultaneously. Roodbergen et al. (2008) used the aisle-centers metric to optimize a traditional layout by finding the optimal number of pick and cross aisles and the length of a pick aisle, excluding the width of the cross aisles. They et al. (2010) used the aisle-centers metric to compare well known routing heuristics such as S-shape to dedicated traveling salesman problem (TSP) heuristics and found up to 47% average savings

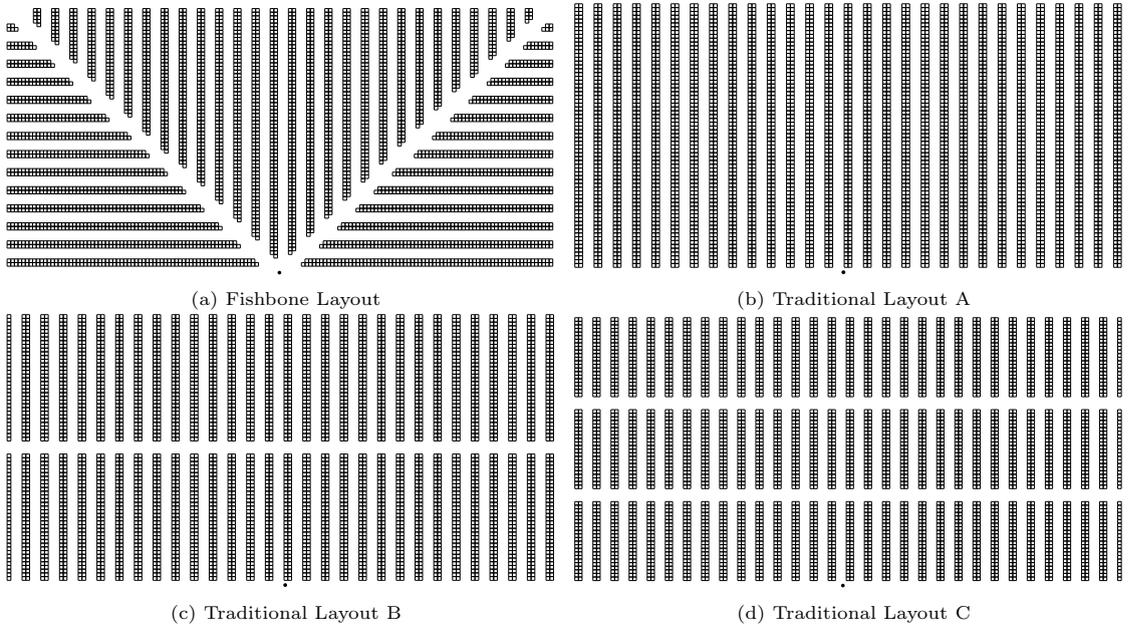


Figure 4: Four warehouse layouts used throughout this paper (dimensions of the warehouse might change depending on the number of SKUs based on the experiment, i.e., number of aisles and storage locations are not constant).

in route distance. Çelik and Süral (2019) considered the order picking problem as a special case of the Steiner TSP and proposed a routing heuristic that uses the Steiner TSP’s graph theoretic properties. Like all the previous papers that used the Steiner TSP for order picking problems such as Ratliff and Rosenthal (1983) and Roodbergen and De Koster (2001b), their distance model was based on the aisle centers-method. Our focus is to model and use an alternative metric for estimating distances of order picking tours and to determine if these distances, which we believe are more reasonable estimates of real worker behavior, make a difference in warehouse design, such as investigated by Roodbergen and De Koster (2001a), Roodbergen and Vis (2006), and Gue and Meller (2009). Our experiments address the following questions:

- By how much does expected travel distance differ between the two distance estimation metrics for a particular layout?
- Using a visibility graph, does the best layout design change from the best design assessed with aisle-centers when comparing traditional layouts A, B, and C (Figure 4)?
- How does the size of the warehouse, the number of picks, and demand skewness affect the difference between the two distance estimation metrics?

The aim of using visibility graphs to model travel distances is not to find shorter paths than those of aisle-centers, but rather to model more closely the distances that typical workers would travel. We postulate that paths produced by the visibility graph with suitable buffers are closer to the actual distance traveled, however validation of this assertion must be left to an empirical study of real worker behavior.

The rest of this paper is organized as follows. In the next section, the literature review related to the shortest path problem is presented. In Section 3, the model to calculate the average distance of a tour for a given warehouse layout and set of pick lists is developed by using the visibility graph distance metric. In Section 4, we address the questions described in Section 1 with three experiments. Conclusions are presented in Section 5.

2. The Shortest Path Problem

The shortest path problem (SPP) seeks a path from a specific origin to a specific destination in a network such that the total cost is minimized. The SPP has widespread applications including vehicle routing in transportation systems (Zhan and Noon, 1998), telecommunications (Moy, 1994), VLSI design (Peyer et al., 2009), and path planning in robotics (Soueres and Laumond, 1996). There are well-known algorithms for solving the SPP, including Dijkstra’s algorithm for solving the single source SPP with non-negative weights (Dijkstra, 1959), the Bellman-Ford-Moore algorithm for solving the single source SPP with possible negative weights (Bellman, 1958; Ford, 1956; Moore, 1959), the A* search algorithm for solving the single source SPP using heuristics for fast evaluation (Hart et al., 1968), the Floyd-Warshall algorithm for solving the all-pairs SPP (Floyd, 1962), and Johnson’s algorithm for solving the all-pairs SPP on sparse graphs (Johnson, 1977). The details of these algorithms can be found in Gallo and Pallottino (1986). The all-pairs SPP has been also studied on massively parallel computer architectures using parallel computing (Habbal et al., 1994).

The Euclidean shortest path problem (ESPP) seeks the shortest path between two points in Euclidean space that does not intersect any of a given set of obstacles. There exist efficient exact algorithms with $\mathcal{O}(n \log n)$ time complexity for problems in the plane, where n is the number of nodes in the graph (Hershberger and Suri, 1999). In three or more dimensions, the Euclidean shortest path problem is NP-hard (Canny and Reif, 1987). In this paper, we are interested in exact algorithms that work in two dimensional space with multiple obstacles. Hershberger and Suri (1999) state that there have been two fundamentally different approaches to this problem: the visibility graph method and the shortest path map method.

The visibility graph method produces a graph whose nodes are the vertices of the obstacles (or attractions) and whose edges are pairs of mutually visible nodes. In other words, for any pair of nodes, if the line segment that connects them does not pass through an obstacle, an edge is created between them. Once the graph is defined, Dijkstra’s algorithm produces the shortest path between any two nodes. The run time complexity of this approach is $\mathcal{O}(n \log n + E)$ for sparse graphs, where E is the number of edges in the graph (Ghosh and Mount, 1991). However, the visibility graph can have n^2 edges in the worst case; therefore algorithms that depend on the visibility graph will have $\mathcal{O}(n^2)$ worst-case run time to find the shortest path between two points. The algorithm we implement in this paper is naïve in that it compares every pair of points in the set of locations

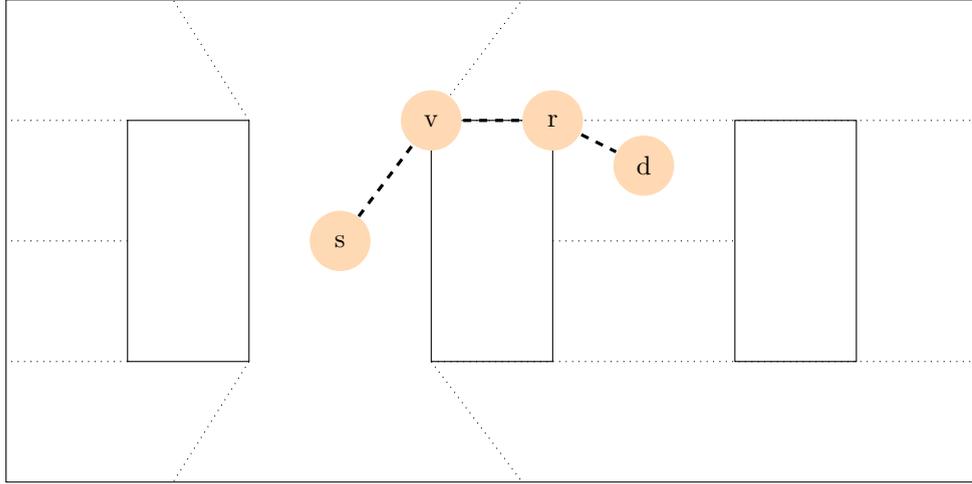


Figure 5: A shortest path map with respect to source point s within a polygonal domain with three obstacles. The heavy dashed path indicates the shortest $s - d$ path, which reaches d via the root r of its cell. Extension segments are shown thin and dotted.

and determines whether a line between them intersects any edges of obstacles. All pairs have to be compared with n edges (a set of obstacles with n vertices has n edges) which makes the overall time complexity of the algorithm $\mathcal{O}(n^3)$.

The shortest path map method decomposes the plane into regions such that all points d in a region have the same sequence of obstacle vertices in their shortest path to s . The last obstacle vertex along the shortest $s - t$ path is the root r of the cell containing d . The root r can see all points within its region. Figure 5 shows an example of the shortest path map. Point s reaches d via obstacle vertices v and r . In this example, vertex r is the root of the region containing d . Hershberger’s algorithm computes shortest paths in the presence of polygonal obstacles in $\mathcal{O}(n \log n)$ time and space, where n is the number of nodes in the graph. For a detailed review of algorithms that use the visibility graph method or the shortest path map method, see Toth et al. (2004).

3. Methodology

There are seven steps to calculate the average distance of a tour for a given warehouse layout and set of pick lists. Steps 4 and 5 are the tasks related to the visibility graph method.

Step 1. Create exterior aisles for a given width and depth of the warehouse. These exterior aisles serve as the boundaries of the rectangle-shaped warehouse.

Step 2. Create cross aisles using exterior and interior points. An exterior point lies on the boundaries of the warehouse (i.e., exterior aisles), and an interior point lies inside the boundaries of the warehouse. Cross aisles divide the warehouse into regions

Step 3. Create pick aisles, pick locations, and storage locations for each region. We assume that items on both sides of a pick aisle may be accessed with negligible lateral movement. Each region may have different angled pick aisles. Figure 6 illustrates such a warehouse.

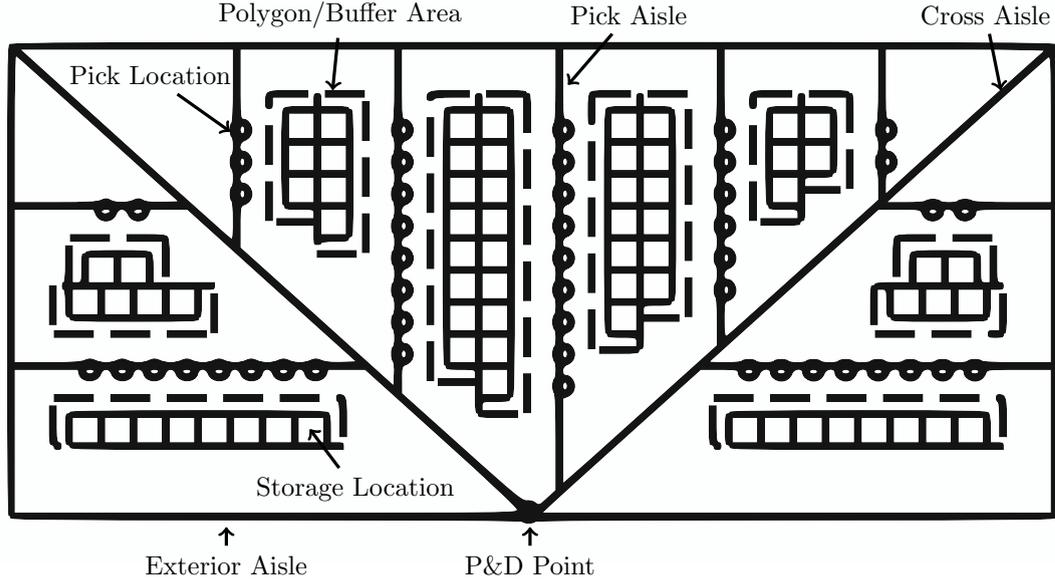


Figure 6: Representation of a warehouse. This particular fishbone layout has a single P&D point, 67 storage locations, 51 pick locations, 9 pick aisles, 2 cross aisles, and 4 exterior aisles. The lines that represent the aisle-centers are both used for building the warehouse structure (i.e., storage locations and pick locations) and finding the shortest path distances with the aisle-centers method.

Step 4. Calculate polygons that will be used in the visibility graph calculation. In this step, we create the polygons considering a buffer region (Lozano-Pérez and Wesley, 1979). The corners of the polygons are also included as nodes in the visibility graph.

Step 5. Let B be the set of polygons which are constructed for each storage location including a buffer region of size β . We define the visibility graph as $G = (V, E)$, where V is the set of nodes containing all pick locations and the corners of each polygon in B and where E is the set of edges between the nodes that are in line of sight of each other. Then, the set of edges is defined as:

$$E = \left\{ (n_1, n_2) \mid n_1, n_2 \in V \text{ with } n_1 \neq n_2, \text{ and } \bigcup_{B_j \in B} L_{n_1, n_2} \cap B_j = \emptyset \right\}, \quad (1)$$

where L_{n_1, n_2} is the set of points on the line segment that connect node n_1 and n_2 and B_j is the set of points in polygon j . If for any polygon j , $L_{n_1, n_2} \cap B_j \neq \emptyset$, the line between node n_1 and n_2 and polygon j intersect. If no polygon intersects with the line between node n_1 and n_2 , the nodes are in each other's line of sight. Furthermore, let d_{n_1, n_2} be the Euclidean distance between nodes n_1 and n_2 , for $(n_1, n_2) \in E$. Finally, the distance between any nodes in V which are not in line of sight can be obtained by applying Dijkstra's algorithm (Dijkstra, 1959).

Step 6. Once the all-pairs shortest path distances are calculated and stored in the *dist* matrix, allocate products to storage locations. We use a dedicated storage policy to keep the locations of the products identical between the two distance metrics so storage will not affect comparisons. We assign the SKU with the smallest ID number to the storage location with the smallest ID number and generate a distance matrix for each order by using the *dist* matrix. In this way, the relative order and position of each SKU is maintained in any warehouse layout design, making the pick distances comparisons as fair as possible. This matrix contains the shortest path distances between the P&D point, or depot, and every storage location to be visited. Finding the shortest tour distance in a warehouse for a pick list is an example of a TSP. In the our experiments, we calculate optimal travel distances using the Concorde TSP solver (Applegate et al., 2007), but any TSP solver can be used.

Step 7. Calculate the average of all TSP distances.

3.1. Adding a Buffer

As mentioned before, it is not practical to assume an order picker will cut corners so sharply as to brush up along side of the storage infrastructure. Therefore, we devise the concept of the buffer which artificially increases the size of the storage obstacles so the path better mimics the way a typical human would walk. When the size of the buffer increases, the polygons (buffer areas) become larger and visibility decreases. Figure 7 shows an example of a visibility graph for a fishbone layout with a 2 ft. buffer size. Figures 8a and 8b are two examples of visibility between pick locations. If the buffer size is 1 ft., then pick location 1 is visible to both pick locations 2 and 3. However, visibility between pick locations 1 and 2 is lost when the buffer size increases to 2 feet.

It is important to note that the density of the visibility graph decreases with greater buffer size. For example, when there is no buffer distance between storage locations and picker paths there are 1092 arcs created for the visibility graph in this example. The number of arcs for 0.5, 1.0, and 2.0 ft. buffer distances are 1046, 1014, and 930, respectively. When the buffer size becomes sufficiently large, the visibility graph becomes similar to the aisle-centers graph.

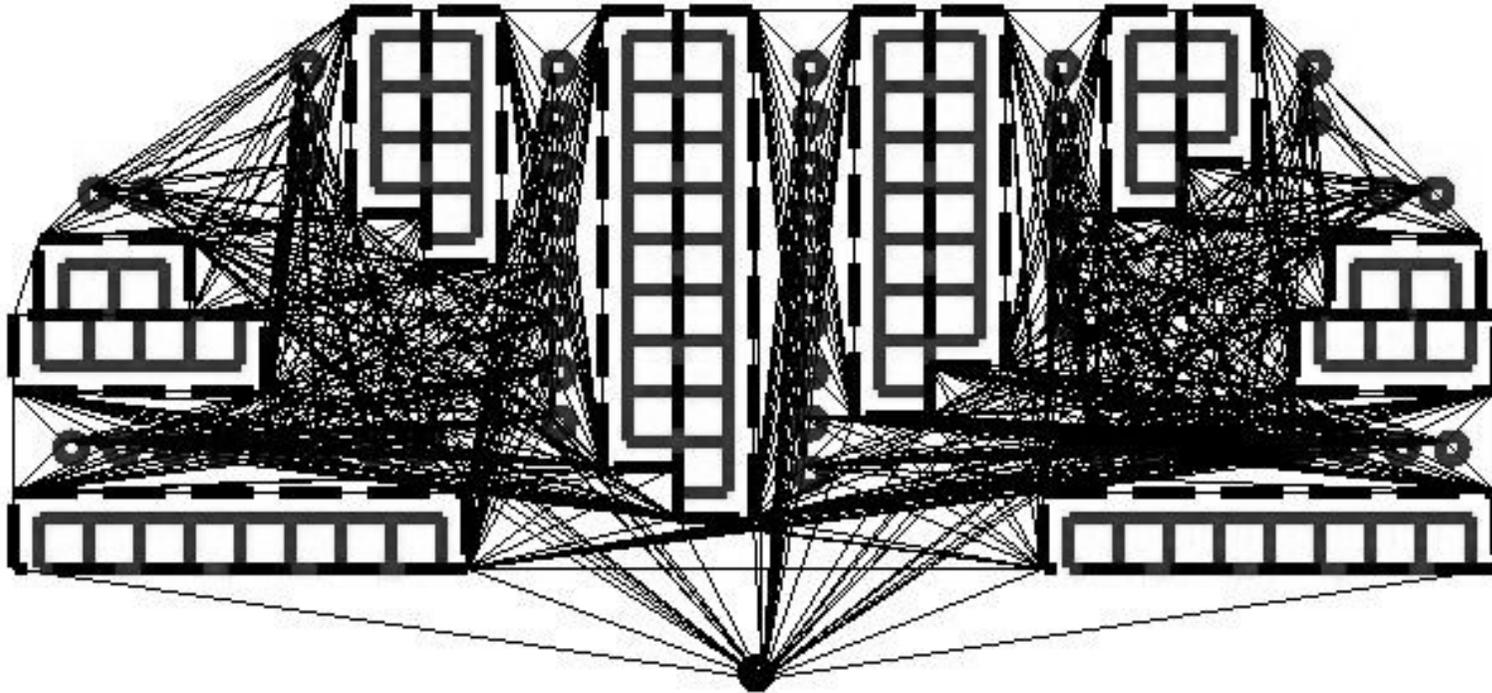


Figure 7: Visibility Graph of a fishbone layout with buffer size of 2 ft.

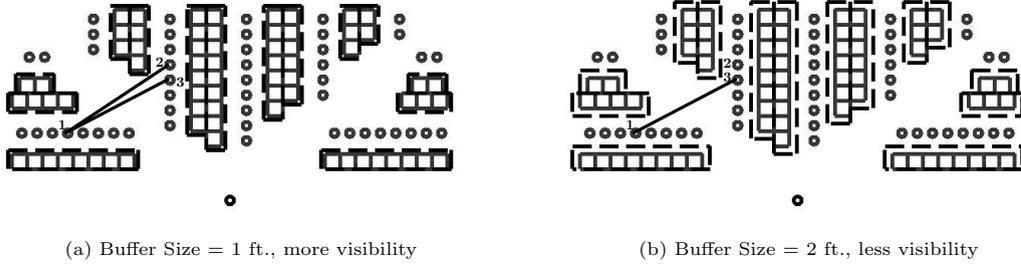


Figure 8: Increasing the buffer size decreases the visibility between pick locations.

3.2. Comparison of Visibility Graph and Aisle-Centers Methods

While our approach for the paper is one of practical significance of the differences between the aisle-centers method and the visibility graph method, a baseline can be established analytically. In this section, we analyze the differences between the visibility graph and aisle-centers methods using closed form expressions. To examine this difference in more detail analytically we must look at a specific layout design. We do so by choosing a very common design - Traditional Layout A.

For Traditional Layout A we assume random storage policy which is commonly used in unit-load storage to maximize space utilization. Traditional Layout A, as depicted in Figure 9, has parallel picking aisles that are perpendicular to the front wall, but has no cross aisle. A single depot is optimally located in the middle of the bottom cross aisle Roodbergen and Vis (2006). Example travel paths between two locations by using aisle-centers and the visibility graph are depicted as solid lines and dashed lines, respectively. We do not consider a buffer distance here. The location on the left is a distance x from the bottom of aisle i and the location on the right is a distance y from the bottom of aisle j . The length of each picking aisle is L and the half width of the cross aisle is v . The warehouse has n picking aisles, where n can be odd or even.

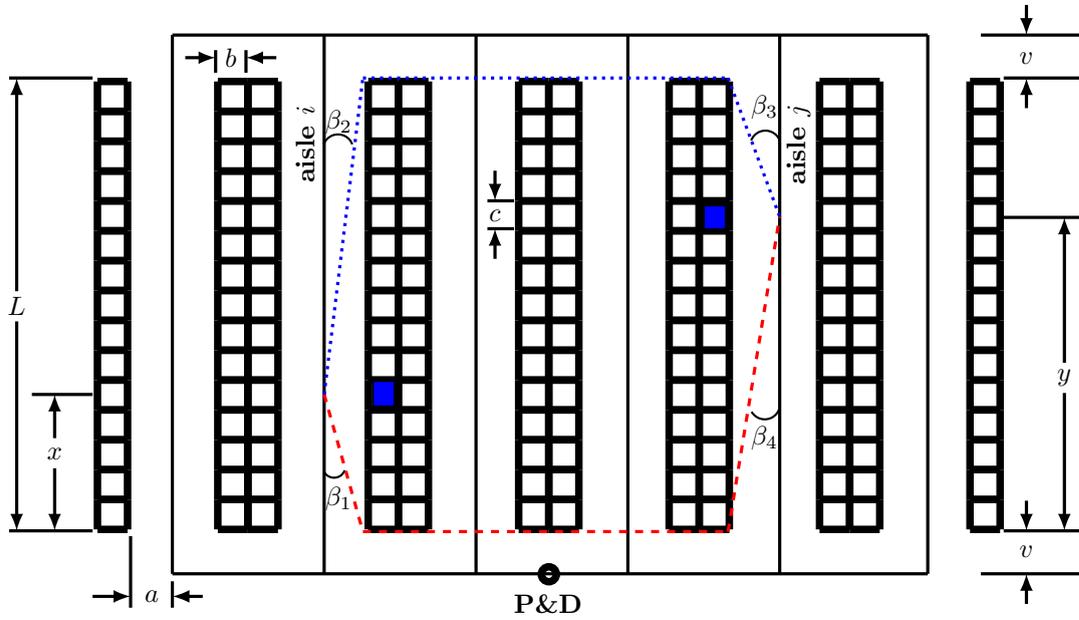


Figure 9: Traditional Layout A

There is no distance difference between the two methods if two pick locations are on the same picking aisle (travel between distance, TB, will be $|x - y|$). If two items are on different picking aisles, the maximum difference occurs when aisle i and aisle j are adjacent, i.e., $|i - j| = 1$. In other cases, the picker travels parallel to the cross aisle which will not perform the shortcut leveraged by the visibility graph approach. There are n possible ways that $i = j$, and these incur no cross aisle travel. Therefore, the probability that $|i - j| = 0$ is n/n^2 . Similarly, there are $2(n - 1)$ combinations for the case $|i - j| = 1$. Therefore, $Pr(|i - j| = 1) = 2(n - 1)/n^2$. In general,

$$Pr(|i - j| = k) = \frac{2(n - k)}{n^2} \quad (2)$$

Since $\lim_{n \rightarrow \infty} \frac{2(n - 1)}{n^2} = 0$, we can conclude that the number of aisles, n , for the maximum distance difference is 2. To fully calculate the expected paths for the visibility graph method, the values of the pick aisle half width, a , the storage location depth, b , the storage location width, c , the cross aisle half width, v , the pick location's distance to cross aisle in aisle i , x , and the pick location's distance to the cross aisle in aisle j must be included. There are two possible ways of picking: exiting either from bottom or from top, and both are equally likely because of the uniform distribution of picking. The expected cross aisle travel distance for the visibility graph is

$$\frac{2(n - 1)(a(n - 2) + b(n - 1))}{3n} \quad (3)$$

and the expected picking aisle travel distance for the visibility graph is

$$\frac{1}{n} \left(\frac{L}{3} \right) + \frac{n-1}{n} f_1(a, L) \quad (4)$$

The derivations of (3) and (4) including the definition of $f_1(a, L)$ are found in the Appendix. Given (3) and (4), the expected travel distance between locations for Traditional Layout A using the visibility method is

$$E[TB_{VG}] = \frac{1}{n} \left[\frac{L}{3} + (n-1)f_1(a, L) \right] + \frac{2(n-1)(a(n-2) + b(n-1))}{3n} \quad (5)$$

The expected travel distance between locations for Traditional Layout A using the aisle-centers method (using the equation from Pohl et al. (2009a)) is

$$E[TB_{ACM}] = \frac{1}{n} \left[\frac{L}{3} + (n-1) \left(\frac{2}{3}L + 2v \right) \right] + \frac{2(a+b)(n^2-1)}{3n} \quad (6)$$

Note that the aisle width term in Pohl et al. (2009a) is replaced with $2a + 2b$ in our version. The expected overestimation between the aisle-centers method (using the equation from Pohl et al. (2009a) for the expected aisle-centers method distance) and visibility graph method can be shown as

$$\frac{E[TB_{ACM}] - E[TB_{VG}]}{E[TB_{ACM}]} = \frac{(n-1) \left(\begin{aligned} &16a^2\sqrt{a^2+L^2} - 8L^2\sqrt{a^2+L^2} + 15a^2L \log \left(\frac{a}{\sqrt{a^2+L^2}+L} \right) \\ &- 6a^2L \log \left(\frac{\sqrt{a^2+L^2}+L}{a} \right) - 3a^2L \tanh^{-1} \left(\frac{L}{\sqrt{a^2+L^2}} \right) \\ &- 16a^3 - 8an^3 + 40an^2 + 24an - 8bn^3 \\ &+ 32bn^2 + 24bn + 8L + 24v \end{aligned} \right)}{4(6(n-1)(an(n+1) + bn(n+1) + v) + L(2n-1))} \quad (7)$$

If $\beta_1, \beta_2, \beta_3,$ and β_4 are equal to 45° the maximum difference between the two distance metrics occurs. This only happens with a single pick location per pick aisle (i.e., $L = c$) and $a = c/2$.

Note that an increase in v will increase the distance for the aisle-centers method but does not affect the visibility graph method for this type of layout. For any constant values of $x, y, L, a, b,$ the $\lim_{v \rightarrow \infty} \frac{Min[x+y+2v+2b, (L-x)+(L-a)+2v+2b]}{Min[\sqrt{x^2+a^2+2b}, \sqrt{(L-x)^2+(L-a)^2+2b}]} = \infty$. In other words, warehouses with wider cross aisles will have a greater distance difference between the two metrics. To evaluate visibility graph distances relative to aisle-centers distances, we calculated the expected travel distances between two locations for various values of $L, v, b,$ and n . Our calculations on overestimation by the aisle-centers distance metric for a variety of warehouse sizes and parameters show a range of 0-47%, over a variety of warehouse shapes and sizes (see the Appendix, Table A1), with the maximum overestimation occurring with two picking aisles with only a few storage locations.

4. Computational Results

To make specific comparisons we devised computational experiments with a variety of warehouse layouts, sizes, and pick characterization. For the results that follow, we assume warehouses between 200 and 1000 pick locations, where a location is a stopping point that gives access to storage slots on both sides of the aisle. We assume a uniform demand and random storage policy in order not to create “hot zones” that are visited more often. We assume picking and cross aisles are 12 feet wide and that storage locations are 4×4 feet. We use a 2.5 feet buffer around all obstacles to estimate the paths with small size pickers such as human pickers with carts. We also used a 3.5 feet buffer around all obstacles to estimate the paths with large size pickers such as forklifts or automated guided vehicles. These are all reasonable assumptions in current warehousing (Goetschalckx and Ratliff, 1988).

Picking tours vary between 1 and 30 locations. We use the order generation method of Çelik and Süral (2014), but instead of evaluating 100 orders for each pick list size, we vary the number of orders. In general, tours with few picks have a higher variance in travel distance, so we increase the sample size for small pick lists to decrease the variability. Table 1 shows the number of orders sampled for each pick list size. The number of orders sampled for each pick list size is sufficient to guarantee a relative error of estimating mean travel distance of at most 1% with a probability 95%.

Table 1: Number of orders evaluated for each pick list size.

Pick List Size	Number of Orders
1	10000
2	5000
3	3333
5	2000
10	1000
30	333

The percentage difference between average travel distances in two layouts T_1 and T_2 is

$$\frac{T_1 - T_2}{T_1} \times 100. \quad (8)$$

4.1. Comparing Distance Models in a Typical Warehouse

For traditional layouts (Figures 4b, 4c, 4d) distances produced by the visibility graph method are less than those produced by the aisle-centers method, but how significant is the difference? Table 2 shows the percentage overestimation of average travel distances for traditional layouts A, B, and C, which is as high as 22.43%. The overestimation is smaller for larger warehouses and smaller pick lists. Even the smallest overestimation case is noteworthy (3.31%).

It should be mentioned that the estimated differences between the aisle-centers method and the visibility graph method are upper bounds in some sense, as one would not always expect every

Table 2: Average tour distance overestimations for traditional A, B, and C designs with the aisle-centers method (ACM) compared to the visibility graph method (VGM) with 2.5 and 3.5 ft. buffer sizes.

Picks	SKUs	% Difference					
		Traditional A		Traditional B		Traditional C	
		2.5 ft.	3.5 ft.	2.5 ft.	3.5 ft.	2.5 ft.	3.5 ft.
1	200	9.17	6.79	13.57	10.63	17.00	13.86
1	400	7.51	5.81	11.48	8.90	15.03	12.11
1	600	6.35	4.88	11.55	9.44	12.91	10.20
1	800	6.66	5.42	10.99	9.12	11.77	9.13
1	1000	4.50	3.31	9.15	7.25	12.48	10.20
2	200	10.89	8.20	13.90	10.79	16.92	13.72
2	400	8.92	6.92	11.50	8.84	14.48	11.63
2	600	7.57	5.86	11.42	9.27	12.82	10.15
2	800	7.76	6.28	10.89	8.97	11.29	8.75
2	1000	5.63	4.21	9.06	7.17	11.79	9.57
3	200	12.32	9.39	14.12	10.97	16.90	13.68
3	400	10.13	7.89	11.68	9.00	14.30	11.46
3	600	8.65	6.72	11.54	9.35	12.70	10.05
3	800	8.65	6.96	10.97	9.01	11.08	8.57
3	1000	6.59	4.99	9.17	7.25	11.55	9.37
5	200	14.26	10.95	15.38	11.96	17.50	14.16
5	400	11.90	9.29	12.82	9.90	14.69	11.75
5	600	10.23	7.96	12.69	10.28	13.08	10.35
5	800	10.15	8.14	12.09	9.91	11.41	8.84
5	1000	7.94	6.04	10.13	8.02	11.90	9.64
10	200	16.13	12.40	17.87	13.93	19.33	15.57
10	400	13.89	10.83	15.30	11.86	16.68	13.35
10	600	12.17	9.47	15.38	12.45	14.65	11.52
10	800	12.21	9.79	14.74	12.06	13.23	10.28
10	1000	9.74	7.43	12.51	9.93	13.85	11.23
30	200	15.35	11.84	20.92	16.30	22.43	18.01
30	400	13.97	10.88	18.30	14.18	20.30	16.23
30	600	12.78	9.92	18.83	15.17	17.69	13.80
30	800	13.23	10.58	18.41	14.98	16.91	13.17
30	1000	10.76	8.20	15.91	12.60	17.94	14.55

picker to always take the shortest possible path while moving from one location to another.

Careful investigation of individual picking tours revealed that paths created by a visibility graph are especially shorter around corners at the ends of aisles, as when a picker exits a picking aisle and begins travel in a cross aisle. The aisle-centers method assumes the worker walks straight ahead until he or she reaches the center of the cross aisle, then makes a 90 degree turn and continues. The visibility graph assumes the worker walks directly to the corner of the buffer region and then “hugs” the edge if the next pick is on the same side of the cross aisle. This sort of corner cutting results in a sizeable reduction in distance.

The end-of-aisle effect also explains why the difference in expected distances between the two metrics increases with the number of picks: more picks means more aisles visited, and each transition to a new picking aisle incurs an end-of-aisle difference. Moreover, the difference in expected distances increases with a smaller buffer size (2.5 ft. vs. 3.5 ft.) because of greater flexibility of

taking shortcuts. In other words, a human worker with a cart can take a shorter path because of his or her size compared to a forklift or automated guided vehicle. Finally, percent differences tend to go down as the size of the warehouse increases: as aisles get longer, more of each tour is within aisles and corner cutting comprises less of the overall distance.

4.2. Traditional Design Using the Visibility Graph versus Aisle-Centers with Fixed Pick List Size

Choosing the number and orientation of cross aisles in a layout requires finding a design that minimizes expected travel distance. With a model based on visibility graphs instead of aisle-centers, should we expect different design decisions?

We consider this question in the context of layouts with parallel picking aisles and orthogonal cross aisles (so-called “traditional designs”). Table 3 shows best to worst ranking of traditional layouts A, B, and C with each method (“*” indicates that best to worst layout ranking order has changed). Smaller warehouses have a larger percentage gap in average tour distance between the aisle-centers method and the visibility graph method. 7 out of 30 best to worst rankings change for both 2.5 ft and 3.5 ft buffer sizes. More importantly, in 13.3% of the cases the best layout with respect to average tour distance changes for both 2.5 ft and 3.5 ft buffer sizes. For these cases, the difference in estimated travel distance is between 0.2% and 3.4%. The penalty of choosing a design using aisle-centers is non-zero only when the best layout changes between the two distance estimation methods.

As an added analysis, we considered a small example to see if and how the ordering of the picks changes by using the visibility graph method. We considered a small warehouse of traditional B design with 200 SKUs and 10 pick lists with each pick list of 5 items. This warehouse has 12 feet cross aisle and pick aisles and 4 feet wide and deep storage locations. The pick lists were generated using Benders Model and all items have uniform demand (i.e., each item has an equal probability of being picked). All items were allocated to the same locations in both the visibility graph and aisle-centers methods. From the solution files of Concorde TSP solver for each of 10 pick lists and found that 8 out of 10 pick lists had a different optimal sequence to pick the items on the pick list.

4.3. Traditional Design Using the Visibility Graph versus Aisle-Centers with Variable Pick List Size

In previous section, we have used fixed size generated pick lists for comparison. Even though it is useful analysis on the comparative efficiency of these layouts, the design of the warehouse is not determined based on a single pick list size unless it is a single-command or a dual-command system. Therefore, we extended the analysis of the previous section by using actual pick list data which has combinations of different pick list sizes (see Table 4). We compared the same three traditional designs from previous section. We used three different set of pick lists from real data. Table 5 shows the warehouse design parameters for each set of pick lists.

Table 3: Average tour distance overestimations for traditional A, B, and C designs with the aisle-centers method (ACM) versus the visibility graph method (VGM) with 2.5 and 3.5 ft. buffer sizes.

Picks	SKUs	Average tour distance (ft.)										Penalty cost (%)			
		Traditional A		Traditional B		Traditional C		Best to worst			2.5 ft.	3.5 ft.			
		ACM	2.5	3.5	ACM	2.5	3.5	ACM	2.5 ft.	3.5 ft.					
1	200	141	128	132	162	140	145	175	145	151	A, B, C	A, B, C	A, B, C	0.0	0.0
1	400	194	179	183	210	186	191	229	194	201	A, B, C	A, B, C	A, B, C	0.0	0.0
1	600	234	219	222	255	225	231	266	231	238	A, B, C	A, B, C	A, B, C	0.0	0.0
1	800	274	255	259	293	261	267	297	262	270	A, B, C	A, B, C	A, B, C	0.0	0.0
1	1000	297	283	287	317	288	294	338	295	303	A, B, C	A, B, C	A, B, C	0.0	0.0
2	200	236	210	216	248	214	221	270	224	233	A, B, C	A, B, C	A, B, C	0.0	0.0
2	400	325	296	302	324	286	295	349	298	308	B, A, C	B, A, C	B, A, C	0.0	0.0
2	600	391	362	369	395	350	358	407	355	366	A, B, C	B, C, A*	B, C, A*	3.4	2.9
2	800	458	423	430	453	404	412	454	403	414	B, C, A	C, B, A*	B, C, A	0.3	0.0
2	1000	498	470	477	491	447	456	514	454	465	B, A, C	B, C, A*	B, C, A*	0.0	0.0
3	200	302	264	273	303	260	270	330	274	285	A, B, C	B, A, C*	B, A, C*	1.6	1.3
3	400	417	375	384	395	349	360	427	366	378	B, A, C	B, C, A*	B, C, A*	0.0	0.0
3	600	504	460	470	483	428	438	498	434	448	B, C, A	B, C, A	B, C, A	0.0	0.0
3	800	588	537	547	556	495	506	555	493	507	C, B, A	C, B, A	B, C, A*	0.0	0.3
3	1000	640	598	608	603	548	559	628	556	569	B, C, A	B, C, A	B, C, A	0.0	0.0
5	200	393	337	350	384	325	338	413	341	355	B, A, C	B, A, C	B, A, C	0.0	0.0
5	400	551	485	500	504	440	454	531	453	469	B, C, A	B, C, A	B, C, A	0.0	0.0
5	600	668	599	615	616	538	552	621	540	557	B, C, A	B, C, A	B, C, A	0.0	0.0
5	800	782	702	718	707	622	637	691	612	630	C, B, A	C, B, A	C, B, A	0.0	0.0
5	1000	851	784	800	767	689	706	783	690	707	B, C, A	B, C, A	B, C, A	0.0	0.0
10	200	542	455	475	523	430	451	553	446	467	B, A, C	B, C, A*	B, C, A*	0.0	0.0
10	400	779	671	695	690	584	608	711	593	616	B, C, A	B, C, A	B, C, A	0.0	0.0
10	600	958	841	867	851	720	745	835	713	739	C, B, A	C, B, A	C, B, A	0.0	0.0
10	800	1135	996	1024	978	834	860	923	801	828	C, B, A	C, B, A	C, B, A	0.0	0.0
10	1000	1238	1117	1146	1060	928	955	1050	905	932	C, B, A	C, B, A	C, B, A	0.0	0.0
30	200	758	642	669	797	630	667	872	677	715	A, B, C	B, A, C*	B, A, C*	1.8	0.2
30	400	1181	1016	1052	1105	903	948	1148	915	961	B, C, A	B, C, A	B, C, A	0.0	0.0
30	600	1538	1342	1386	1409	1144	1196	1370	1128	1181	C, B, A	C, B, A	C, B, A	0.0	0.0
30	800	1887	1637	1687	1654	1349	1406	1524	1266	1323	C, B, A	C, B, A	C, B, A	0.0	0.0
30	1000	2114	1887	1941	1818	1529	1589	1754	1440	1499	C, B, A	C, B, A	C, B, A	0.0	0.0

Table 4: Three sets of actual pick list (PL) data.

PL Set#	Number of SKUs	Number of PLs	Average Number of SKUs per PL
1	597	4625	7.93
2	510	4957	7.40
3	267	98	10.21

Table 5: Warehouse parameters used for the computational experiments for variable pick list data.

PL Set#	Layout	Number of Locations	Area	Aspect Ratio	Pick Aisle Angles
1	Traditional A	598	33811	0.50	90
1	Traditional B	600	38662	0.50	90, 90
1	Traditional C	600	41800	0.54	90, 90, 90
2	Traditional A	520	30746	0.55	90
2	Traditional B	528	34322	0.50	90, 90
2	Traditional C	525	38662	0.50	90, 90, 90
3	Traditional A	272	17681	0.50	90
3	Traditional B	272	20812	0.50	90, 90
3	Traditional C	285	24994	0.52	90, 90, 90

Table 6: Average tour distance overestimations for traditional A, B, and C designs with the aisle-centers method (ACM) versus the visibility graph method (VGM) with 2.5 and 3.5 ft. buffer sizes with variable pick list data sets.

PL Set	Average tour distance (ft.)									Penalty cost (%)				
	Traditional A			Traditional B			Traditional C			Best to worst				
	ACM	2.5	3.5	ACM	2.5	3.5	ACM	2.5	3.5	ACM	2.5 ft.	3.5 ft.	2.5 ft.	3.5 ft.
1	451	411	420	544	470	486	542	463	481	A, C, B	A, C, B	A, C, B	0.0	0.0
2	434	396	405	478	407	422	491	410	427	A, B, C	A, B, C	A, B, C	0.0	0.0
3	390.9	345	356	391	329	343	477	393	411	A, B, C	B, A, C	B, A, C	4.6	3.7

Table 6 shows best to worst ranking of traditional layouts A, B, and C with each method (“*” indicates that best to worst layout ranking order has changed). Similar to the previous experiment with uniform pick list sizes, smaller warehouses have a larger percentage gap in average tour distance between the aisle-centers method and the visibility graph method. In one out of three cases, the preferred layout with respect to average tour distance changes for both 2.5 ft and 3.5 ft buffer sizes changes. For these cases, the difference in estimated travel distance is between 3.7% and 4.6%.

4.4. Fishbone Design Using the Visibility Graph versus Aisle-Centers

Even a cursory look at the geometry of visibility graphs suggests important differences from the aisle-centers method when picking and cross aisles meet at other than right angles. Specifically, when a worker must turn more than 90 degrees, the aisle-centers method assumes the worker travels an unreasonable path, whereas a visibility graph represents a more reasonable path. Conversely, if a worker turns into an aisle at, say, 45 degrees, then the aisle-centers and visibility graph methods produce similar, though not identical, distances.

For single-command, unit-load operations in a fishbone design, pickers make turns only at 45 degrees, and so there is less advantage to cutting a corner. This observation suggests that the difference between the aisle-centers and visibility graph methods should be less for a fishbone design than for a traditional design. For tours with more than one pick, workers will sometimes have to turn more than 90 degrees in a fishbone design, so we expect the difference in average distance between the visibility graph and aisle-centers methods to increase.

To investigate these questions, we consider a fishbone and traditional design B with the pa-

Table 7: Warehouse parameters used for the fishbone experiments.

Layout	Number of Locations	Area	Aspect Ratio	Pick Aisle Angles
Traditional B	4012	191260	0.51	90, 90
Fishbone	4000	196109	0.50	0, 90, 0

rameters in Table 7. Aspect ratio is the ratio of depth to the width of the warehouse. A 0.5 aspect ratio means that the warehouse is twice as wide as deep. Traditional Layout B has two regions and each region has 90 degree pick aisles. The fishbone layout has three regions. The left and right regions have 0 degree pick aisles and the middle region has 90 degree pick aisles. For many warehouses, the customer demand distribution is skewed. Therefore, in this section we also consider cases in which demand is not uniform. Figure 10 shows the results for uniform demand and for 20/40, 20/60, and 20/80 demand skewness. For single-command operations, the fishbone layout’s performance improvement over traditional layout B decreases from 18.17% to 15.12% (2.5 ft. buffer) and 15.87% (3.5 ft. buffer) when using the visibility graph method, as expected. As the size of the pick list increases, the aisle-centers method produces longer distances relative to the visibility graph, so the percent improvement of a fishbone design is lower, and eventually negative. The results are similar for all values of demand skewness.

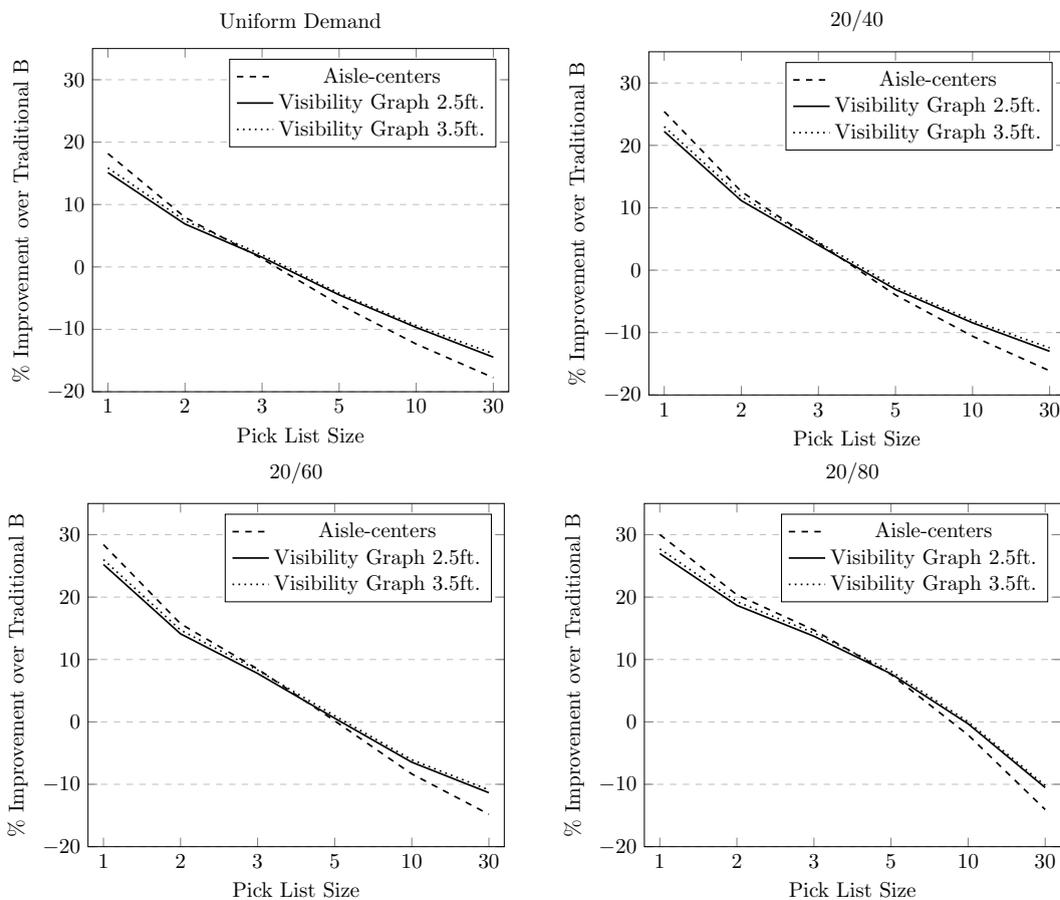


Figure 10: The change in relative fishbone percent improvement over traditional Layout B as pick list size increases.

4.5. The Effect of the Warehouse Size in Percent Improvement of Fishbone Layouts

In a final set of experiments, we analyze the percent improvement of the fishbone layout over traditional layout A (see Figure 4b) for unit-load (i.e., single command) operations and different warehouse sizes. We use traditional layout A instead of traditional layout B because addition of the middle aisle of traditional layout B has no benefit for unit-load operations (Gue and Meller, 2009). This set of experiments is similar to the discrete model analysis performed by Öztürkoğlu et al. (2012) and Pohl et al. (2011). Figure 11 shows the results. The curves in Figure 11 are not smooth because as warehouse size (number of SKUs) increases, the number of picking aisles in the fishbone and traditional layout A warehouses change discretely and independently of one another. For small warehouses, the difference between the two distance models is as high as 5.89%. As the size of the warehouse increases, the difference between the two metrics decreases because a greater percentage of travel is within aisles and not between them.

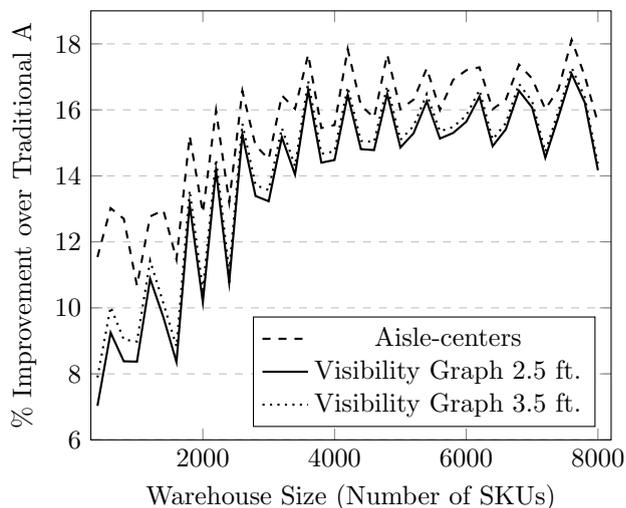


Figure 11: Percent improvement of a fishbone design over traditional layout A for single-command unit-load operations and different warehouse sizes.

5. Conclusions

Although we have not made the case with observational data, we contend that a properly established visibility graph better represents travel paths associated with reasonable worker behavior in order picking warehouses. The traditional model of distances based on aisle-centers assumes that workers walk to the center of picking and cross aisles and then (assuming a traditional design) make right angle turns to continue. The visibility graph assumes workers will make reasonable efforts to cut corners and therefore take shorter paths to their destinations. We have shown analytically and empirically that using the aisle-centers method overestimates the distance that a rational worker would walk.

The implications of this new approach are significant. First, it suggests that travel distances between locations in a warehouse are not as long as commonly assumed and therefore that associated labor costs are not as high. Said another way, throughput for a given number of pickers should be higher than predicted by the traditional model because workers travel shorter paths than the model assumes.

Second, preferred warehouse designs based on the new distance estimation model can be different than those based on the aisle-centers method. In 13.3% of the cases we considered, the selected traditional layout was different when using a visibility graph distance metric. An interesting follow-on study could consider non-traditional designs with diagonal aisles using the visibility graph during the warehouse design phase.

Third, our results suggest that the previous results of Gue and Meller (2009) and Çelik and Süral (2014) over-estimate the potential benefit of diagonal aisles versus traditional layouts for unit-load and order picking operations. This is not to say that these designs do not offer benefit, only that the level of benefit is probably not as high as their original models suggest.

As future work, we can ‘smooth’ the corners of the paths using a Bezier interpolation which takes turning radii into account and provide more accurate distance measures. Another major step forward would be a human study conducted in warehouse environments to ascertain the degree of natural corner cutting by workers.

Acknowledgment

This research was supported in part by the National Science Foundation under Grant CMMI-1200567. Any opinions, findings, and conclusions or recommendations expressed in this material are those of the authors and do not necessarily reflect the views of the National Science Foundation. The authors would like to thank Dr. Aleksandr Vinel for his contributions to some of the analytical results and to undergraduate and graduate research assistants Michael Robbins, Ataman Billor, and Akhil Varma Jampana for data collection and testing the code. Source code and binary files can be downloaded from <https://github.com/gokhanozden/gabak>.

Appendix

In this appendix we derive closed forms expressions for the expected travel distance between two random locations for the visibility graph method and compare this to the same value for the aisle-centers method from the work of Pohl et al. (2009a). Then, we calculate the expected difference between them, and thus the overestimation of the aisle-centers method.

We divide the travel distance into two components: cross aisle travel and picking aisle travel (as does Pohl et al. (2009a)). We assume the locations are uniformly distributed among the aisles. All aisles are equally likely to contain one of the two locations because of the uniform distribution. There are n^2 possible combinations of i and j for n number of aisles (all locations are equally likely to be picked). There are n possible ways that $i = j$, for which no cross aisle travel is required. The probability that $|i = j| = 0$ is n/n^2 . Similarly, there are $2(n - 1)$ combinations of $|i - j|$, so $Pr(|i - j| = 1) = 2(n - 1)/n^2$. Unlike Pohl et al. (2009a), we have a special case where the cross aisle distance is $2b$ when $|i - j| = 1$ instead of $2a + 2b$ as in Pohl et al. (2009a). Therefore we directly calculate the expected cross aisle travel distance instead of first calculating the expected number of aisle widths between i and j (which is not uniform for all i and j values). Considering the special case, the expected cross aisle travel distance for the visibility graph (for $n > 0$) is

$$E[TB_{crossaisle}] = \sum_{k=1}^{n-1} \frac{2(n-k)}{n^2} (2b + (k-1)(2a+2b)) = \frac{2(n-1)(a(n-2) + b(n+1))}{3n} \quad (9)$$

For picking aisle travel using the visibility graph, there are two cases: two locations are in the same picking aisle and two locations are in different picking aisles. Since we assume a continuous uniform distribution within each aisle, we let X_i and Y_j be uniform random variables that represent

Table A1: Expected Travel Between Distances by Visibility Graph (VG) and Aisle-Centers Method (ACM), Simulation Results and Absolute Percentage Difference Between $E[TB_{VG}]$ and Simulation, and the Overestimation of the ACM for Various Warehouse Parameters.

a	L	n	v	b	$E[TB_{VG}]$	Simulation	% Diff	$E[TB_{ACM}]$	Overestimation (%)
6	6	1	6	4	2.00	2.00	0.00	2.00	0.00
6	6	1	6	2	2.00	2.00	0.00	2.00	0.00
6	6	1	6	1	2.00	2.00	0.00	2.00	0.00
6	6	2	6	4	11.46	11.46	0.02	19.00	39.69
6	6	2	6	2	9.46	9.47	0.13	17.00	44.35
6	6	2	6	1	8.46	8.46	0.05	16.00	47.13
6	6	50	6	4	334.14	334.88	0.22	348.92	4.24
6	6	50	6	2	267.50	266.54	0.36	282.28	5.24
6	6	50	6	1	234.18	234.32	0.06	248.96	5.94
6	240	1	6	4	80.00	80.00	0.00	80.00	0.00
6	240	1	6	2	80.00	80.00	0.00	80.00	0.00
6	240	1	6	1	80.00	80.00	0.00	80.00	0.00
6	240	2	6	4	124.58	124.64	0.05	136.00	8.39
6	240	2	6	2	122.58	122.71	0.10	134.00	8.52
6	240	2	6	1	121.58	122.02	0.35	133.00	8.58
6	240	50	6	4	480.99	480.38	0.13	503.36	4.44
6	240	50	6	2	414.35	413.48	0.21	436.72	5.12
6	240	50	6	1	381.03	381.73	0.18	403.40	5.55

the positions of the locations in aisles i and j , respectively, where $X_j \sim U(0, L)$ and $Y_j \sim U(0, L)$. From probability theory, we know the expected distance between two locations on the same aisle of length L is $E[|x - y|] = L/3$. For the second case where locations are on different aisles, the picking aisle travel distance is $\min[\sqrt{x^2 + a^2} + \sqrt{y^2 + a^2}, \sqrt{(L - x)^2 + (L - y)^2}]$. Then,

$$\begin{aligned}
 f_1(a, L) &= E[\min[\sqrt{y^2 + a^2}, \sqrt{(L - x)^2 + (L - y)^2}]] = \\
 &= \frac{1}{12L^2} \left(16a^3 - 16a^2\sqrt{a^2 + L^2} + 8L^2\sqrt{a^2 + L^2} + 3a^2L \operatorname{ArchTanh} \left[\frac{L}{\sqrt{a^2 + L^2}} \right] \right. \\
 &\quad \left. - 15a^2L \operatorname{Log} \left[\frac{a}{L + \sqrt{a^2 + L^2}} \right] + 6a^2L \operatorname{Log} \left[\frac{L + \sqrt{a^2 + L^2}}{a} \right] \right)
 \end{aligned} \tag{10}$$

The probability the second location will be in the same aisle as the first location (i.e. $|i - j| = 0$) is $1/n$, and the probability the second location will be in a different aisle $(n - 1)/n$. The expected picking aisle travel distance is then

$$\frac{1}{n} \left(\frac{L}{3} \right) + \frac{n - 1}{n} f_1(a, L) \tag{11}$$

To compare this quantity for different warehouse sizes we calculate the values in Table A1 and also verify the analytical results for the visibility graph with simulation. Simulation experiments are done based on 100,000 trials. The results range from no overestimation to nearly 50%. The simulation results provide nearly total agreement with the analytic equations derived in this appendix.

References

- Altarazi, S.A., Ammouri, M.M., 2018. Concurrent manual-order-picking warehouse design: a simulation-based design of experiments approach. *International Journal of Production Research* 56, 7103–7121.
- Applegate, D.L., Bixby, R.E., Chvatal, V., Cook, W.J., 2007. *The Traveling Salesman Problem: A Computational Study: A Computational Study*. Princeton University Press.
- Bellman, R., 1958. On a routing problem. *Quarterly of Applied Mathematics* 16, 87–90.
- Canny, J., Reif, J., 1987. New lower bound techniques for robot motion planning problems, in: *Proceedings of the 28th Annual Symposium on Foundations of Computer Science*, IEEE Computer Society Press, Los Alamitos, CA, pp. 49–60.
- Çelik, M., Süral, H., 2014. Order picking under random and turnover-based storage policies in fishbone aisle warehouses. *IIE Transactions* 46, 283–300.
- Çelik, M., Süral, H., 2019. Order picking in parallel-aisle warehouses with multiple blocks: complexity and a graph theory-based heuristic. *International Journal of Production Research* 57, 888–906.
- Dijkstra, A.S., Roodbergen, K.J., 2017. Exact route-length formulas and a storage location assignment heuristic for picker-to-parts warehouses. *Transportation Research Part E: Logistics and Transportation Review* 102, 38–59.
- Dijkstra, E.W., 1959. A note on two problems in connexion. *Numerische Mathematik* 1, 269–271.
- Floyd, R.W., 1962. Algorithm 97: shortest path. *Communications of the ACM* 5, 345.
- Ford, L.R., 1956. *Network Flow Theory*. Technical Report. The Rand Corporation.
- Gallo, G., Pallottino, S., 1986. Shortest path methods: a unifying approach, in: *Netflow at Pisa*. Springer, pp. 38–64.
- Ghosh, S.K., Mount, D.M., 1991. An output-sensitive algorithm for computing visibility graphs. *SIAM Journal on Computing* 20, 888–910.
- Goetschalckx, M., Ratliff, H.D., 1988. Order picking in an aisle. *IIE Transactions* 20, 53–62.
- Gue, K.R., Meller, R.D., 2009. Aisle configurations for unit-load warehouses. *IIE Transactions* 41(3), 171–182.
- Habbal, M.B., Koutsopoulos, H.N., Lerman, S.R., 1994. A decomposition algorithm for the all-pairs shortest path problem on massively parallel computer architectures. *Transportation Science* 28, 292–308.
- Hall, R.W., 1993. Distance approximation for routing manual pickers in a warehouse. *IIE Transactions* 25, 76–87.
- Hart, P.E., Nilsson, N.J., Raphael, B., 1968. A formal basis for the heuristic determination of minimum cost paths. *IEEE Transactions on Systems Science and Cybernetics* 4, 100–107.
- Hershberger, J., Suri, S., 1999. An optimal algorithm for euclidean shortest paths in the plane. *SIAM Journal on Computing* 28, 2215–2256.
- Johnson, D.B., 1977. Efficient algorithms for shortest paths in sparse networks. *Journal of the ACM (JACM)* 24, 1–13.
- Lozano-Pérez, T., Wesley, M.A., 1979. An algorithm for planning collision-free paths among polyhedral obstacles. *Communications of the ACM* 22, 560–570.
- Moore, E.F., 1959. The shortest path through a maze, in: *Proc. International Symposium on the Theory of Switching*, Harvard University Press. pp. 285–292. URL: <http://ci.nii.ac.jp/naid/10010192763/en/>.
- Moy, J., 1994. Open shortest path first version 2. rfc 1583. Internet Engineering Task Force. URL: <http://www.ietf.org/>.
- Öztürkoğlu, Ö., Gue, K.R., Meller, R.D., 2012. Optimal unit-load warehouse designs for single-command operations. *IIE Transactions* 44, 459–475.
- Petersen, C.G., 1999. The impact of routing and storage policies on warehouse efficiency. *International Journal of Operations & Production Management* 19, 1053–1064.
- Peyer, S., Rautenbach, D., Vygen, J., 2009. A generalization of Dijkstra’s shortest path algorithm with applications to VLSI routing. *Journal of Discrete Algorithms* 7, 377–390.
- Pohl, L.M., Meller, R.D., Gue, K.R., 2009a. An analysis of dual-command operations in common warehouse designs. *Transportation Research Part E: Logistics and Transportation Review* 45, 367–379.

- Pohl, L.M., Meller, R.D., Gue, K.R., 2009b. Optimizing fishbone aisles for dual-command operations in a warehouse. *Naval Research Logistics* 56, 389–403.
- Pohl, L.M., Meller, R.D., Gue, K.R., 2011. Turnover-based storage in non-traditional unit-load warehouse designs. *IIE Transactions* 43, 703–720.
- Ratliff, H.D., Rosenthal, A.S., 1983. Order-picking in a rectangular warehouse: a solvable case of the traveling salesman problem. *Operations Research* 31, 507–521.
- Roodbergen, K.J., De Koster, R., 2001a. Routing methods for warehouses with multiple cross aisles. *International Journal of Production Research* 39, 1865–1883.
- Roodbergen, K.J., De Koster, R., 2001b. Routing order pickers in a warehouse with a middle aisle. *European Journal of Operational Research* 133(1), 32–43.
- Roodbergen, K.J., Sharp, G.P., Vis, I.F., 2008. Designing the layout structure of manual order picking areas in warehouses. *IIE Transactions* 40, 1032–1045.
- Roodbergen, K.J., Vis, I.F.A., 2006. A model for warehouse layout. *IIE Transactions* 38, 799–811.
- Soueres, P., Laumond, J.P., 1996. Shortest paths synthesis for a car-like robot. *IEEE Transactions on Automatic Control* 41, 672–688.
- Theys, C., Bräysy, O., Dullaert, W., Raa, B., 2010. Using a TSP heuristic for routing order pickers in warehouses. *European Journal of Operational Research* 200, 755–763.
- Toth, C.D., O’Rourke, J., Goodman, J.E., 2004. *Handbook of discrete and computational geometry*. CRC Press.
- Zhan, F.B., Noon, C.E., 1998. Shortest path algorithms: an evaluation using real road networks. *Transportation Science* 32, 65–73.